


EcoTRAQ E1C-5

Single Entry 950x1300mm
Masonry Shaft

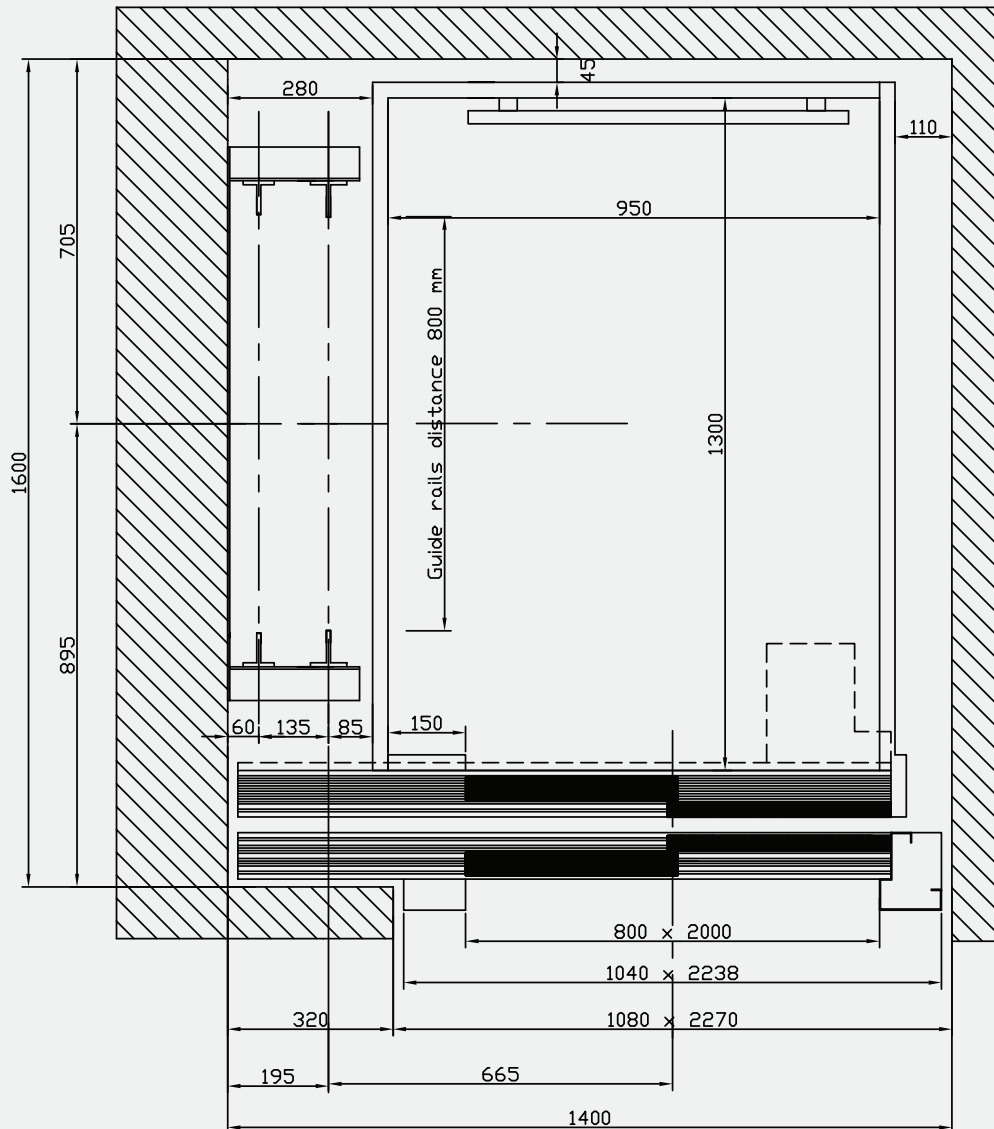

SPECIFICATIONS

Carrying Capacity: 400kg

Nominal Speed: 0.30m/sec

Motor Cabinet: 500w x 300d x 700h mm

Pit Depth: 200mm

Headroom: 2700mm

Max Travel: 12m

Configuration: Right (DX) or Left (SX) Rail side available

Code Compliance: AS1735.18 / 16 (Residential)

NOTE: Alternate Hinging may affect shaft size



easy living[®]
home elevators
designed to impress



100% Italian Quality Elevators
STATE OF THE ART SHOWROOMS AUSTRALIA WIDE
NSW & ACT: 02 8116 1500 VIC & TAS: 03 9094 8600
QLD & NT: 07 3851 7500 WA & SA: 08 6272 9400
www.easy-living.com.au sales@easy-living.com.au