EcoTRAQ E2A-8

Adjacent Entry 1200x1200mm
Masonry Shaft

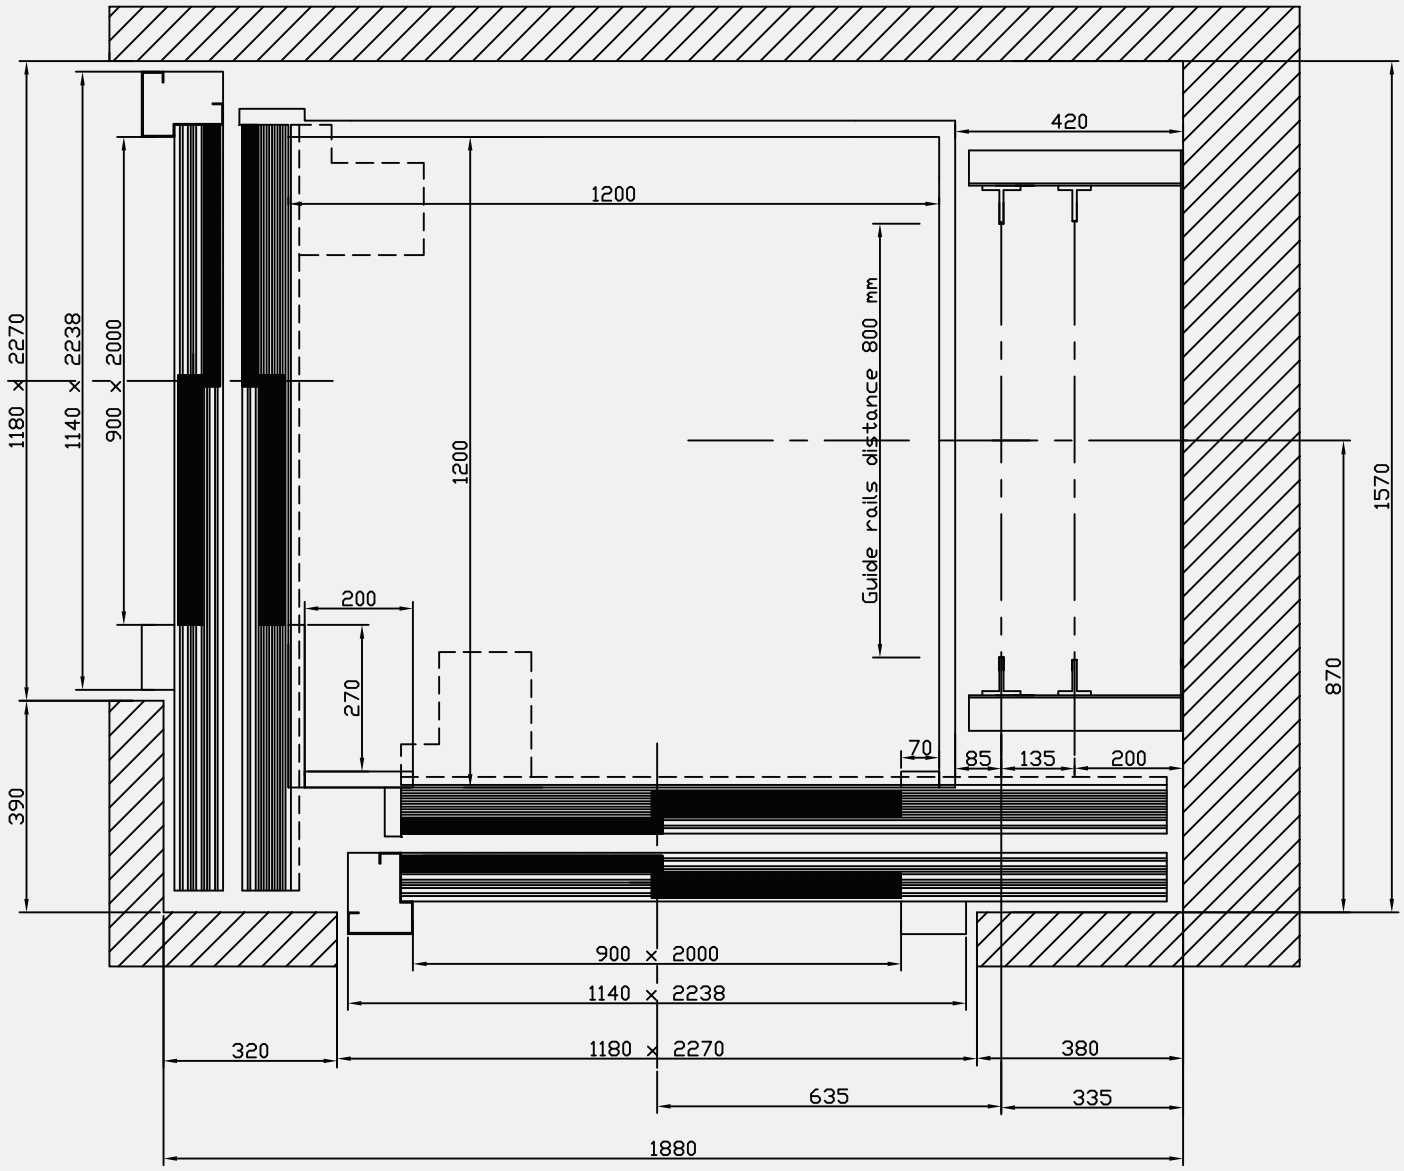

SPECIFICATIONS

Carrying Capacity: 400kg
Nominal Speed: 0.30m/sec
Motor Cabinet: 500w x 300d x 700h mm

Pit Depth: 200mm
Headroom: 2700mm
Max Travel: 12m

Configuration: Right (DX) or Left (SX) Rail side available
Code Compliance: AS1735.18 / 16 (Residential)
NOTE: Alternate Hinging may affect shaft size

easy living® home elevators
designed to impress
20 CELEBRATING YEARS 1998-2018

100% Italian Quality Elevators
STATE OF THE ART SHOWROOMS AUSTRALIA WIDE
NSW & ACT: 02 8116 1500 **VIC & TAS:** 03 9094 8600
QLD & NT: 07 3851 7500 **WA & SA:** 08 6272 9400
www.easy-living.com.au sales@easy-living.com.au

For reference only. Please contact our lift consultant for more information Copyright Easy Living Home Elevators, 2018