


# ORDER FORM

## COLOURS AND TRIM

### WALLS



SKINPLATE  
Polished White A32PP

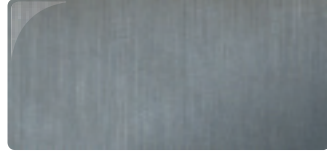


SKINPLATE  
Metal Effect F12PPS  
Polished stainless effect



STAINLESS STEEL  
Brushed 127

### FLOORING

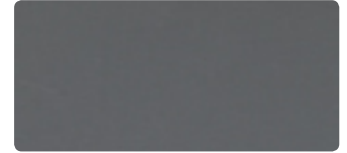

RUBBER  
Smooth Grey

### OPERATING PANEL

Installed in the centre of the wall panel, on the car guide rail side  
Measures: 450W X 1600H mm



SKINPLATE  
Polished White  
A32PP



SKINPLATE  
Metal Effect  
F12PPS



STAINLESS  
BRUSHED  
127

### LANDING PANEL



STAINLESS  
BRUSHED  
127



PUSHBUTTONS  
With braille and  
red backlighting

### LED LIGHTING



Ceiling: painted steel sheet  
finished in white RAL9010

### DOORS



DOOR HANDLE  
Natural anodised  
stainless steel



RAL PAINTED  
RAL7001  
Silver grey colour



RAL PAINTED  
RAL9010  
Pure white colour

### NOTES:

### THESE CAR FINISHES ARE APPROVED:


SIGNED: \_\_\_\_\_

COMPANY: \_\_\_\_\_

NAME: \_\_\_\_\_


DATE: \_\_\_\_\_

# SPECIFICATIONS

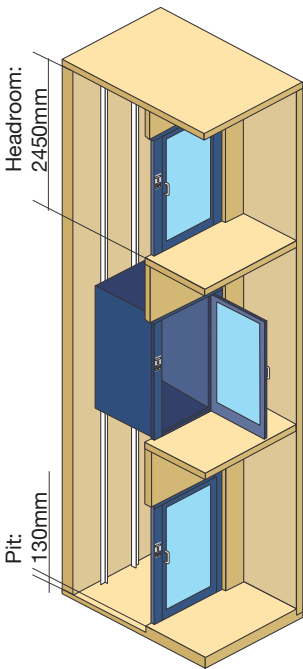

Carrying Capacity	250kg
Speed	0.25m/sec
Maximum Travel	6,600mm
Max No of Stops	3
Configuration	Single and through car entrance
Min Pit Depth	130mm
Minimum Head Room (top floor)	2450mm
Motor Cabinet	600W x 280D x 1000H mm
Max distance from shaft	3,000mm
Power	Single Phase dedicated supply

## AGILE DRAWING

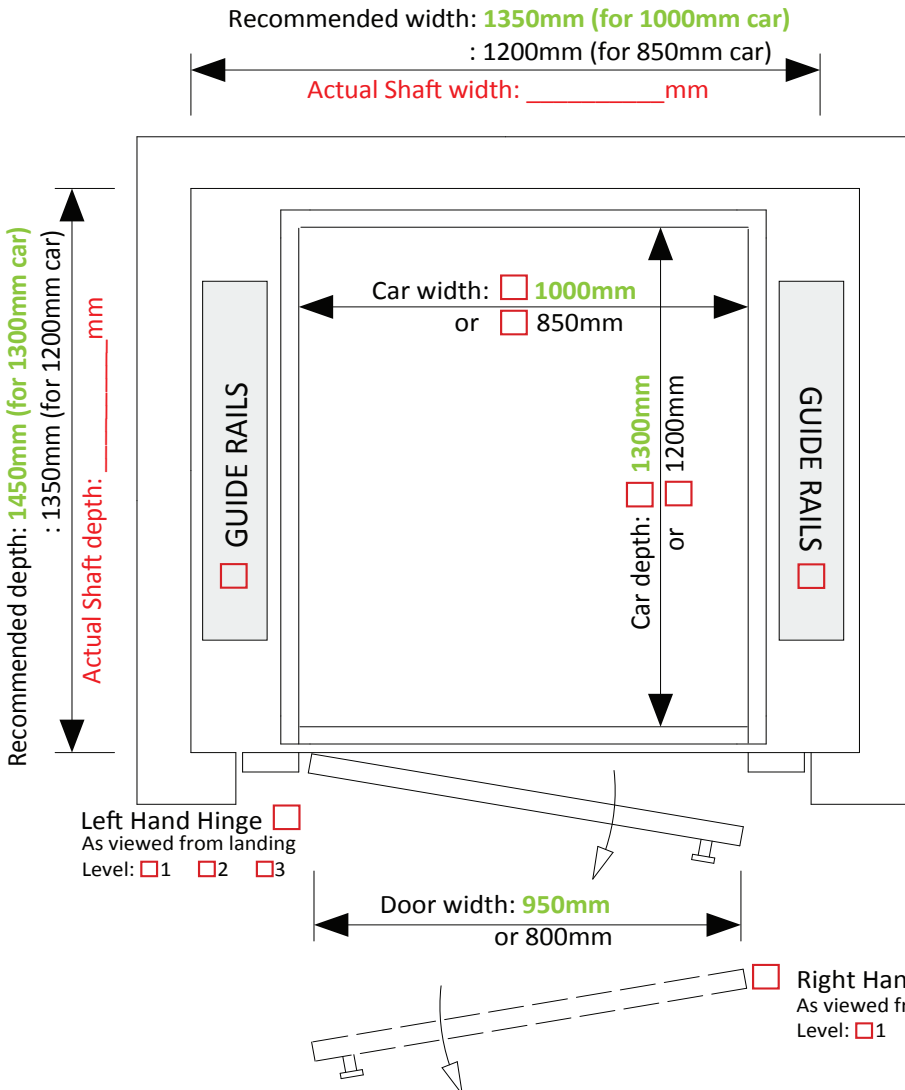

Number of floors: \_\_\_\_\_

Entrance type: \_\_\_\_\_

Travel height: \_\_\_\_\_ mm

Floor to floor distance:

1-2: \_\_\_\_\_ mm

2-3: \_\_\_\_\_ mm

Control Cabinet location:

Lowest level + \_\_\_\_\_ mm  
(maximum 3000mm)

**THIS LAYOUT IS APPROVED:**

SIGNED: \_\_\_\_\_

NAME: \_\_\_\_\_

DATE: \_\_\_\_\_